


# N-Wave

## SPECIFICATION OF 1/2" SUPERFLEX CABLE JUMPER DIN MALE TO 4.3/10 MALE, Lm

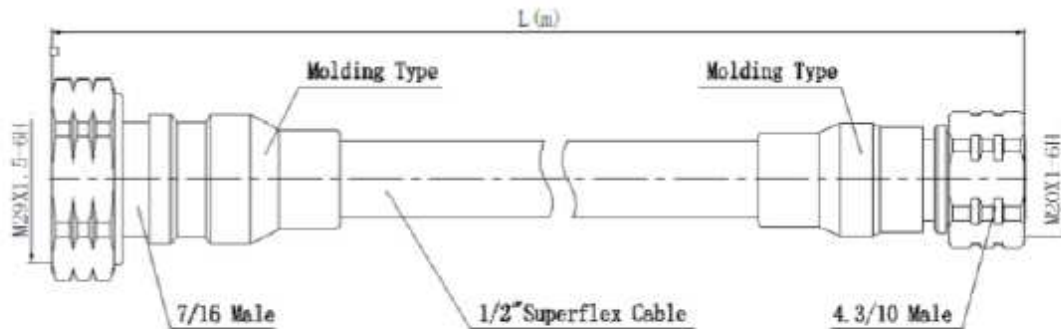

1/2" Superflex Cable

### Interface

According to

IEC 60169-4

IEC61169-54

### Electrical

Characteristic Impedance

50Ω

Frequency Range

DC-3.0GHz

VSWR

≤1.12

PIM(@2-tonex20w)

≤-160 dBc

Dielectric Withstanding Voltage

≥2500V RMS,50Hz

Dielectric Resistance

≥5000MΩ

### Mechanical

Durability

Mating cycles ≥500

### Material and plating

Part

Material

plating

Body

Brass

Tri-Alloy

Center conductor

Brass / Phosphor bronze

Ag

Insulator

PTFE

Other

Brass

Ni

### Environmental

Temperature Range

-40℃~+85℃

Water tightness

IP68(1m water depth, 24hours)

RoHS Compliance

FULL

PT. NexWave

Jl. Tebet Raya No. 5 , Jakarta – Indonesia

Telp. +62 21 8290809